

Terysafe

Model: B100-Y
Eye Washer

Application: Wall Mounted Eye Washer is using in rushing to deal with an emergency, quickly cleaning the deleterious material which attached to eyes.

Spray Head Assembly: Two spray heads. Each head has a dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 3/8" IPS chrome plated brass stay-open ball valve. Valve is activated by flag handle. Unit remains in operation until handle is returned to closed position.


Eye Wash Bowl: 11-1/2" diameter. Bowl is ABS plastic.

Pipe and Fittings: Schedule 1" and 1/2" galvanized steel. Furnished with green polyethylene covers for vertical piping for corrosion resistance.

Supply: 1-1/4" NPT female inlet.

Waste: 1-1/4" NPT female outlet.

Quality Assurance: Valve, bowl and spray head assembly is factory assembled.

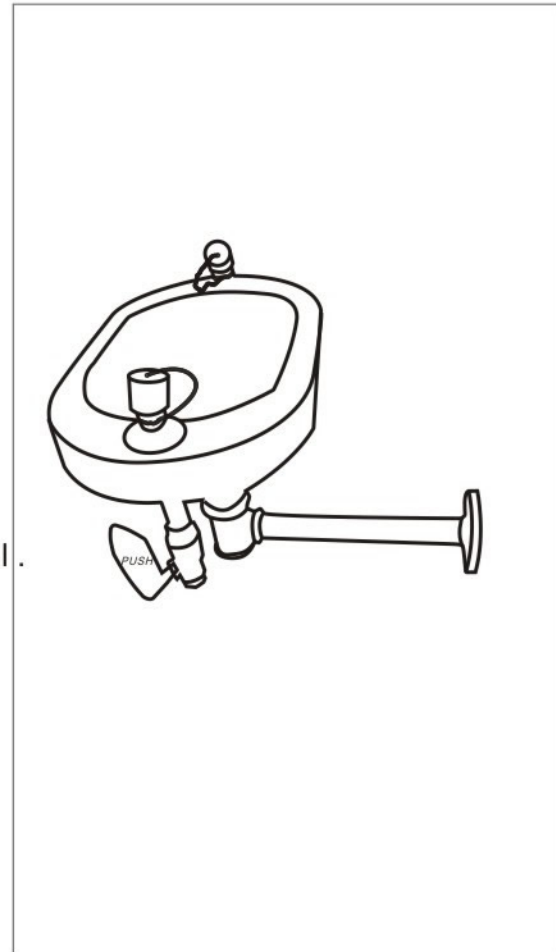


Product Feature

- Controlled, low velocity flow completely rinses eyes and face is not injurious to user.
- Eye washer unit deliver 11.5 liters of water per minute.
- Outlet heads position meets 89/686/EEC and ANSI Z358.1-2004, DIN 12899 and UNI-9608-4.1990 standard.
- Protect spray heads from airborne contaminants.
- Valve actuator are easy to locate and readily accessible to user.
- Hands-free stay open valve activate within one second.
- Connect unit to uninterruptible water supply delivering at 3 GPM.

Eye Washer Details Parts Listing

| | Part Name | Description | Pieces |
|---|---------------------------|----------------------------------|---------|
| A | Eye Washer Set | See Page 2 for Details | 1 set |
| B | Basin Connection Pipe Set | Galvanized Steel (Pre-assembled) | 1 set |
| C | Hand Control Panel | Cast Iron | 1 piece |

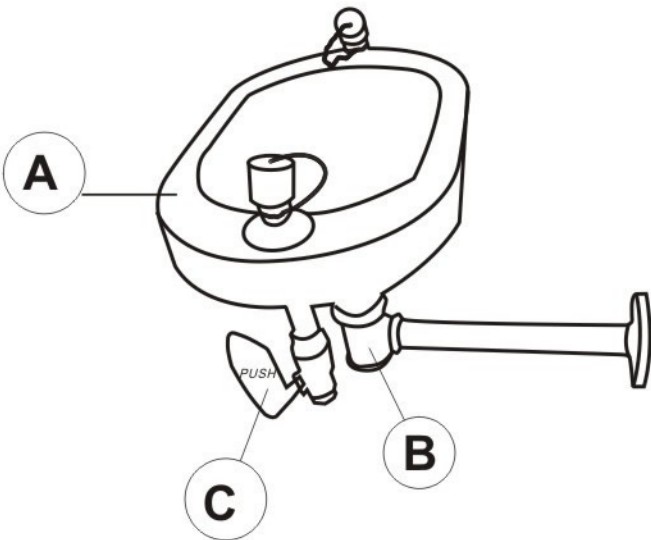

Eye Washer parts details